




Module Weight: 45 lbs.

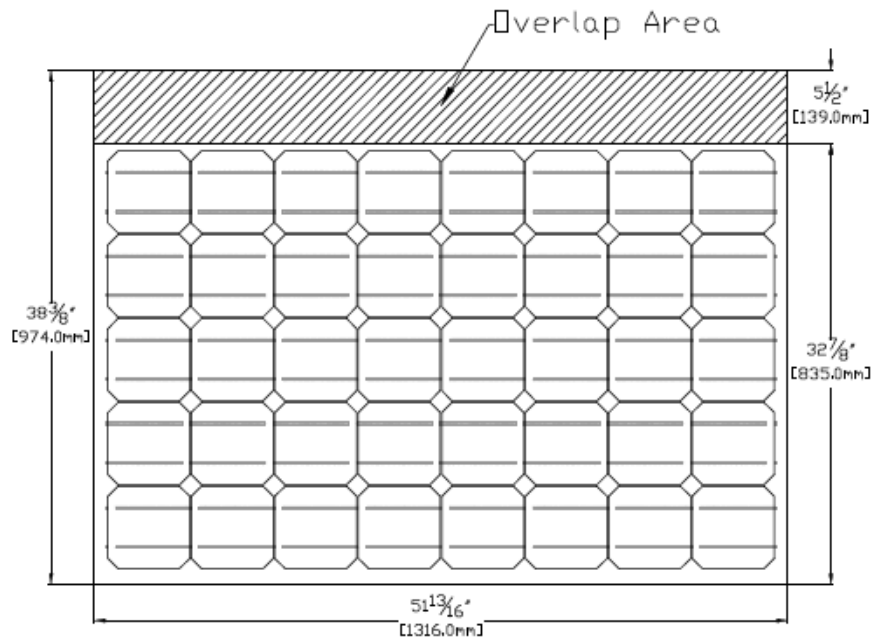

### Module Electrical Characteristics

The electrical characteristics are within ±5% of the indicated values of I<sub>sc</sub>, V<sub>oc</sub> and P<sub>max</sub> under Standard Test Conditions (STC)<sup>1</sup>. Depending on ambient conditions, time of day, time of year, and shading, TallSlate Grandees™ may produce more current and/or voltage than reported at STC. Accordingly, the rated values of I<sub>sc</sub> and V<sub>oc</sub> should be multiplied by a factor of 1.25 when determining component voltage ratings, conductor ampacities, fuse size and the size of controls connected to the PV output.

Note: All characteristics are at STC

Model	TSG156GM
Power	152 Watts
I <sub>sc</sub>	8.40 ADC
V <sub>oc</sub>	25.0 VDC
I <sub>MPP</sub>	7.88 ADC
V <sub>MPP</sub>	19.3 VDC
Series fuse rating:	15 Amp

This product adheres to UL Standard 1703 and is CEC listed. All module components rated for 600 VDC. Do not exceed module maximum voltage rating of 600 VDC.

<sup>1</sup> Standard Test Conditions (STC): 1000 W/m<sup>2</sup> irradiance, 25°C temperature, and AM 1.5 spectrum